


## HIGH VELOCITY DOUBLE DEFLECTION REGISTER Model ADHVDD



### DESIGN DETAILS (mm)

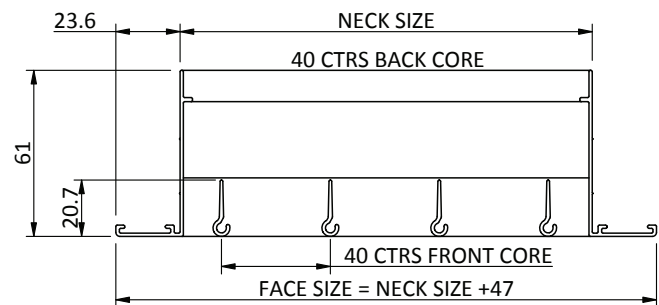

### APPLICATIONS

High velocity wall registers feature two cores with adjustable horizontal and vertical blades at 40mm centres (standard ADDD has 25mm centres).

Designed for applications of high volume air delivery to special purpose systems, most commonly evaporative air conditioning systems.

It is recommended to fix the cores in the frame, after installation, to prevent them from coming loose when the unit is in operation.

### FEATURES

Removable core is supplied as standard.

Support mullions are fitted when blade lengths exceed 600mm.

Cores are assembled with 40mm blade centres.

Aluminium lightweight construction.

Standard finish powder coat satin white.